

Enable PPG PaintManager™ Data Interface

Introduction

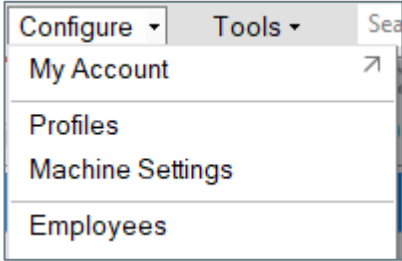
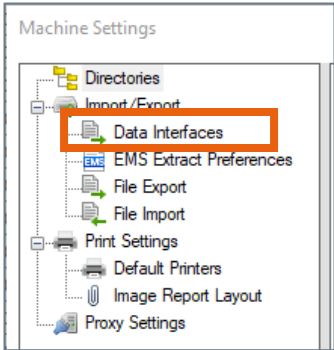
CCC ONE® allows you to enable Data Interfaces with external vendor applications. To do this, you must set up the Data Interface and accept the EULA for that vendor.

This job aid describes how to set up a Data Interface for PPG PaintManager™.

Add Data Interface

Note: Only one PPG PaintManager™ Data Interface can be set up per machine with CCC ONE® installed. If you are an MSO user with access to multiple Locations, you will need to setup the PPG PaintManager™ Data Interface for each Location on separate machines.

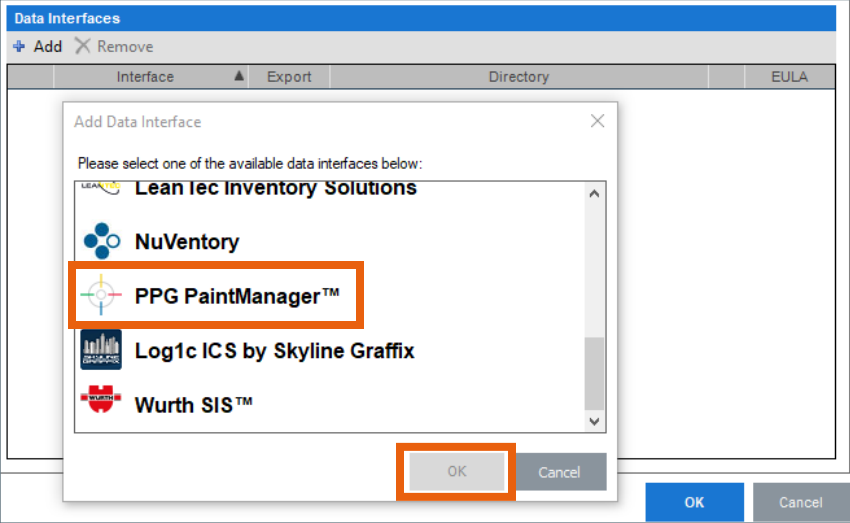
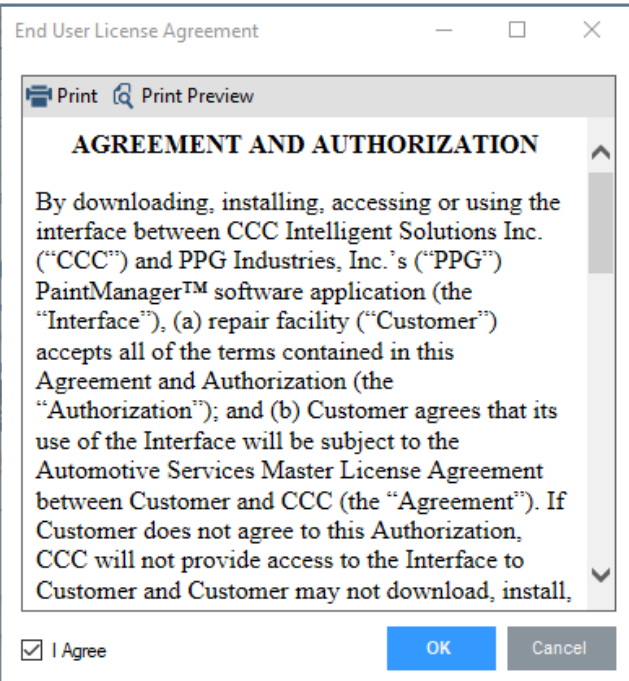
Use the following steps to enable the PPG PaintManager™ Data Interface:

Step	Action
1	Go to Configure and select Machine Settings . 
2	Locate Import/Export and select Data Interfaces . 
3	Click Add on the toolbar. The Add Data Interface screen opens.

Continued on next page

Enable PPG PaintManager™ Data Interface, Continued

(continued)

Step	Action
4	<p>Select PPG PaintManager™ and click OK.</p>  <p>The EULA will display.</p>
5	<p>Click the I Agree checkbox and click OK.</p> 

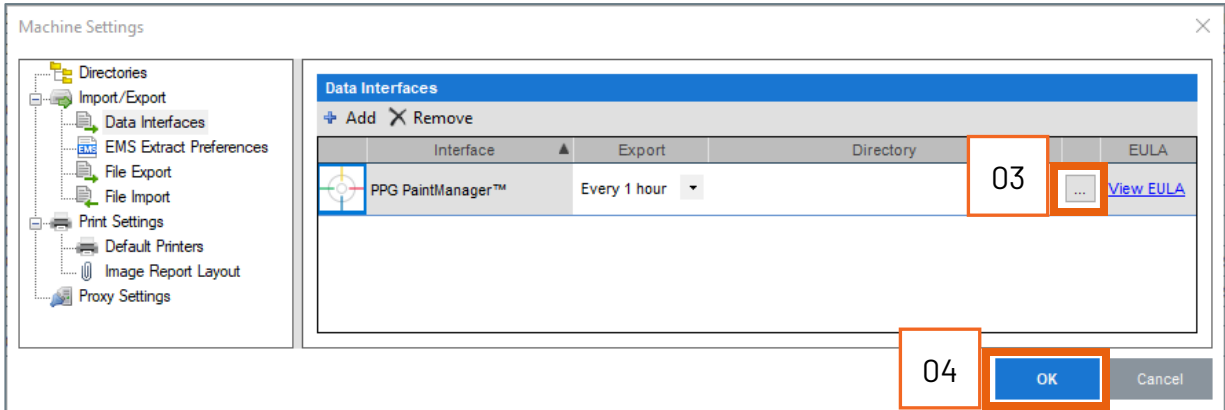
The PPG PaintManager™ Data Interface is added. The next section shows how to complete the Data Interface setup.

Continued on next page

Enable PPG PaintManager™ Data Interface, Continued

Setup PPG PaintManager™ Interface

Use the following steps to configure the newly added PPG PaintManager™ Data Interface:



Step	Action
1	Defaults to Location currently logged into.
2	Choose an Export Frequency . Default is "Every 1 Hour".
3	Enter or browse to the Directory Path for the exported file.
4	Click OK to save your selections.

Once set up, the computer MUST be logged into CCC ONE to export the XML files using the settings you selected.